

# S5700-HI Series Gigabit Enterprise Switches





# S5700-HI Series Gigabit Enterprise Switches

## Product Overview

The S5700-HI series are the latest gigabit Layer 3 multi-service switches developed by Huawei, with the highest processing capabilities and the most service features of all box switches in the industry. The S5700-HI supports basic MPLS, VPLS and VLL functions, millisecond hardware-based BFD, and Eth-OAM technology. Its intelligent monitoring port and dying-gasp function protect the S5700-HI against ultra-low temperature and theft, allowing it to be installed outdoors. In addition, its excellent security and multi-service capabilities make it the best choice as an access switch on large and medium-sized enterprise campus networks and data centers, aggregation switch on small enterprise campus networks, and edge device at the MAN.

## Product Appearance

### S5700-28C-HI



- Twenty-four 10/100/1000Base-T ports
- Subcards supported: 4x1000Base-X SFP subcard, 2x10GE SFP+ subcard, and 4x10GE SFP+ subcard
- Double swappable AC/DC power supplies
- Forwarding performance: 96 Mpps

### S5700-28C-HI-24S



- Twenty-four 100/1000Base-X ports
- Subcards supported: 4x1000Base-X SFP subcard, 2x10GE SFP+ subcard, and 4x10GE SFP+ subcard
- Double swappable AC/DC power supplies
- Forwarding performance: 96 Mpps

## Product Features and highlights

### Powerful support for services

- The S5700-HI switches are cost-effective case-shaped MPLS switches. They support MPLS, VPLS, and VLL functions and can be used as high-quality access devices to provide leased line services for enterprises.
- The S5700-HI provides the Multi-VPN-Instance CE (MCE) function to isolate users in different VLANs on a device, ensuring data security and reducing costs.
- The S5700-HI supports IGMP v1/v2/v3 snooping, IGMP filter, IGMP fast leave, and IGMP proxy. It supports line-speed replication of multicast packets between VLANs, multicast load balancing among member interfaces of a trunk, and controllable multicast, meeting requirements for IPTV services and other multicast services.



## Comprehensive reliability mechanisms

- Besides STP, RSTP, and MSTP, the S5700-HI supports enhanced Ethernet reliability technologies such as Smart Link and RRPP (Rapid Ring Protection Protocol), which implement millisecond-level protection switchover and ensure network reliability. It also provides Smart Link multi-instance and RRPP multi-instance to implement load balancing among links, optimizing bandwidth usage.
- The S5700-HI supports enhanced trunk (E-Trunk) that enables a CE to be dual-homed to two PEs (S5700s). E-Trunk greatly enhances link reliability between devices and implements link aggregation between devices. This improves reliability of access devices.
- The S5700-HI supports the Smart Ethernet Protection (SEP) protocol, a ring network protocol applied to the link layer on an Ethernet network. SEP can be used on open ring networks and can be deployed on upper-layer aggregation devices to provide fast switchover (within 50 ms), ensuring non-stop transmission of services. SEP features simplicity, high reliability, fast switchover, easy maintenance, and flexible topology, facilitating network planning and management.
- The S5700-HI supports Ethernet Ring Protection Switching (ERPS), also referred to as G.8032. As the latest ring network protocol, ERPS was developed based on traditional Ethernet MAC and bridging functions and uses mature Ethernet OAM function and a ring automatic protection switching (R-APS) mechanism to implement millisecond-level protection switching. ERPS supports various services and allows flexible networking, helping customers build a network with lower OPEX and CAPEX.
- The S5700-HI supports redundant power supplies, and can use an AC power supply and a DC power supply simultaneously. Users can choose a single power supply or use two power supplies to ensure device reliability.
- The S5700-HI supports VRRP, and can set up VRRP groups with other Layer 3 switches. VRRP provides redundant routes to ensure stable and reliable communication. Multiple equal-cost routes to an uplink device can be configured on the S5700 to provide route redundancy. When an active route is unreachable, traffic is switched to a backup route.
- The S5700-HI supports BFD, which provides millisecond-level fault detection for protocols such as OSPF, IS-IS, VRRP, and PIM to improve network reliability. Complying with IEEE 802.3ah and 802.1ag, the S5700 supports point-to-point Ethernet fault management and can detect faults in the last mile of an Ethernet link to users.
- The S5700-HI provides 3.3 millisecond hardware-based Ethernet OAM function and Y.1731, which can quickly detect and locate faults. By using the Ethernet OAM technology and switchover technologies, the S5700-HI can provide millisecond-level protective switchover for networks.

## Well-designed QoS policies and security mechanisms

- The S5700-HI implements complex traffic classification based on packet information such as the 5-tuple, IP preference, ToS, DSCP, IP protocol type, ICMP type, TCP source port, VLAN ID, Ethernet protocol type, and CoS. ACLs can be applied to inbound or outbound direction on an interface. The S5700-HI supports a flow-

based two-rate three-color CAR. Each port supports eight priority queues and multiple queue scheduling algorithms such as WRR, DRR, PQ, WRR+PQ, and DRR+PQ. All of these ensure the quality of voice, video, and data services.

- The S5700-HI provides multiple security measures to defend against Denial of Service (DoS) attacks, and attacks against networks or users. DoS attack types include SYN Flood attacks, Land attacks, Smurf attacks, and ICMP Flood attacks. Attacks to networks refer to STP BPDU/root attacks. Attacks to users include bogus DHCP server attacks, man-in-the-middle attacks, IP/MAC spoofing attacks, DHCP request flood attacks. DoS attacks that change the CHADDR field in DHCP packets are also attacks against users.
- The S5700-HI supports DHCP snooping, which generates user binding entries based on MAC addresses, IP addresses, IP address leases, VLAN IDs, and access interfaces of users. DHCP snooping discards invalid packets that do not match any binding entries, such as ARP spoofing packets and IP spoofing packets. This prevents man-in-the-middle attacks to campus networks that hackers initiate by using ARP packets. The interface connected to a DHCP server can be configured as a trusted interface to protect the system against bogus DHCP server attacks.
- The S5700-HI supports strict ARP learning, which prevents ARP spoofing attacks that will exhaust ARP entries. It also provides IP source check to prevent DoS attacks caused by MAC address spoofing, IP address spoofing, and MAC/IP spoofing.
- The S5700-HI supports centralized MAC address authentication, 802.1x authentication, and NAC. It authenticates users based on statically or dynamically bound user information such as the user name, IP address, MAC address, VLAN ID, access interface, and flag indicating whether antivirus software is installed. VLANs, QoS policies, and ACLs can be applied to users dynamically.
- The S5700-HI can limit the number of MAC addresses learned on an interface to prevent attackers from exhausting MAC address entries by using bogus source MAC addresses. This function minimizes packet flooding that occurs when MAC addresses of users cannot be found in the MAC address table.

### Easy deployment and maintenance free

- The S5700-HI supports automatic configuration, plug-and-play, deployment using a USB flash drive, and batch remote upgrade. These capabilities simplify device management and maintenance and reduce maintenance costs. The S5700-HI supports SNMP v1/v2/v3 and provides flexible methods for managing devices. Users can manage the S5700 using the CLI, Web NMS, Telnet, and HGMP. The NQA function helps users with network planning and upgrades. In addition, the S5700 supports NTP, SSH v2, HWTACACS+, RMON, log hosts, and port-based traffic statistics.
- The S5700-HI supports GVRP (GARP VLAN Registration Protocol), which dynamically distributes, registers, and propagates VLAN attributes to reduce manual configuration workloads of network administrators and to

ensure correct VLAN configuration. In a complex network topology, GVRP simplifies VLAN configuration and reduces network communication faults caused by incorrect VLAN configuration.

- The S5700-HI supports MUX VLAN. MUX VLAN isolates Layer 2 traffic between interfaces in a VLAN. Interfaces in a subordinate separate VLAN can communicate with ports in the principal VLAN but cannot communicate with each other. MUX VLAN is usually used on an enterprise intranet to isolate user interfaces from each other but allow them to communicate with server interfaces. This function prevents communication between network devices connected to certain interfaces or interface groups but allows the devices to communicate with the default gateway.

### Various IPv6 features

- The S5700-HI supports IPv4/IPv6 dual stack and can migrate from an IPv4 network to an IPv6 network. S5700-HI hardware supports IPv4/IPv6 dual stack, IPv6 over IPv4 tunnels (including manual tunnels, 6to4 tunnels, and ISATAP tunnels), and Layer 3 line-speed forwarding. The S5700 can be deployed on IPv4 networks, IPv6 networks, or networks that run both IPv4 and IPv6. This makes networking flexible and enables a network to migrate from IPv4 to IPv6.

### Product Specifications

Item	S5700-HI	
	S5700-28C-HI	S5700-28C-HI-24S
1000M port	24*10/100/1000Base-T	24*100/1000Base-X
Extended slot	provides an extended slot for an uplink subcard	
MAC address table	IEEE 802.1d compliance 32K MAC address entries MAC address learning and aging Static, dynamic, and blackhole MAC address entries Packet filtering based on source MAC addresses	
VLAN	4K VLANs Guest VLAN and voice VLAN VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and ports 1:1 and N:1 VLAN Mapping	
Reliability	RRPP ring topology and RRPP multi-instance Smart Link tree topology and Smart Link multi-instance, providing the millisecond-level protection switchover SEP ERPS(G.8032) BFD for OSPF, BFD for IS-IS, BFD for VRRP, and BFD for PIM STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s) BPDU protection, root protection, and loop protection E-Trunk	

Item	S5700-HI	
	S5700-28C-HI	S5700-28C-HI-24S
MPLS features	MPLS, MPLS VLL	
VPLS	Martini VPLS	
IP routing	Static routing, RIPv1, RIPv2, OSPF, IS-IS, BGP, and ECMP	
IPv6 features	Neighbor Discovery (ND) Path MTU (PMTU) IPv6 ping, IPv6 tracer, and IPv6 Telnet 6to4 tunnel, ISATAP tunnel, and manually configured tunnel ACLs based on the source IPv6 address, destination IPv6 address, Layer 4 ports, or protocol type MLD v1/v2 snooping	
multicast	IGMP v1/v2/v3 snooping and IGMP fast leave Multicast forwarding in a VLAN and multicast replication between VLANs Multicast load balancing among member ports of a trunk Controllable multicast Port-based multicast traffic statistics IGMP v1/v2/v3, PIM-SM, PIM-DM, and PIM-SSM	
QoS/ACL	Rate limiting on packets sent and received by an interface Packet redirection Port-based traffic policing and two-rate three-color CAR Eight queues on each port WRR, DRR, PQ, WRR+PQ, and DRR+PQ queue scheduling algorithms WRED Re-marking of the 802.1p priority and DSCP priority Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, port number, protocol type, and VLAN ID Rate limiting in each queue and traffic shaping on ports	
Security	User privilege management and password protection DoS attack defense, ARP attack defense, and ICMP attack defense Binding of the IP address, MAC address, interface, and VLAN Port isolation, port security, and sticky MAC Blackhole MAC address entries Limit on the number of learned MAC addresses 802.1x authentication and limit on the number of users on an interface AAA authentication, RADIUS authentication, HWTACACS+ authentication, and NAC SSH v2.0 Hypertext Transfer Protocol Secure (HTTPS) CPU defense Blacklist and whitelist	


Item	S5700-HI	
	S5700-28C-HI	S5700-28C-HI-24S
OAM	Hardware implementation EFM OAM CFM OAM Y.1731 performance test supports hardware-level delay and jitter detection	
Management and maintenance	MAC Forced Forwarding (MFF) Virtual cable test Port mirroring and RSPAN (remote port mirroring) Remote configuration and maintenance by using Telnet SNMP v1/v2/v3 RMON Web NMS HGMP System logs and alarms of different levels GVRP MUX VLAN 802.3az EEE sFlow	
Operating environment	Operating temperature: 0°C–50°C (long term); -5°C–55°C (short term) Relative humidity: 10%–90% (non-condensing)	
Input voltage	AC: Rated voltage range: 100 V to 240 V AC, 50/60 Hz Maximum voltage range: 90 V to 264 V AC, 50/60 Hz DC: Rated voltage range: –48 V to –60 V, DC Maximum voltage range: –36 V to –72 V, DC	
Dimensions (W x D x H)	442 mm x 220 mm x 43.6 mm	
Power consumption	< 76 W	<80W



## Applications


### On Large-sized Enterprise Networks

The S5700-HI can function as an access device on a large-sized enterprise network or an aggregation device on a small-sized or medium-sized campus network. It supports link aggregation and dual-homing to improve network reliability.

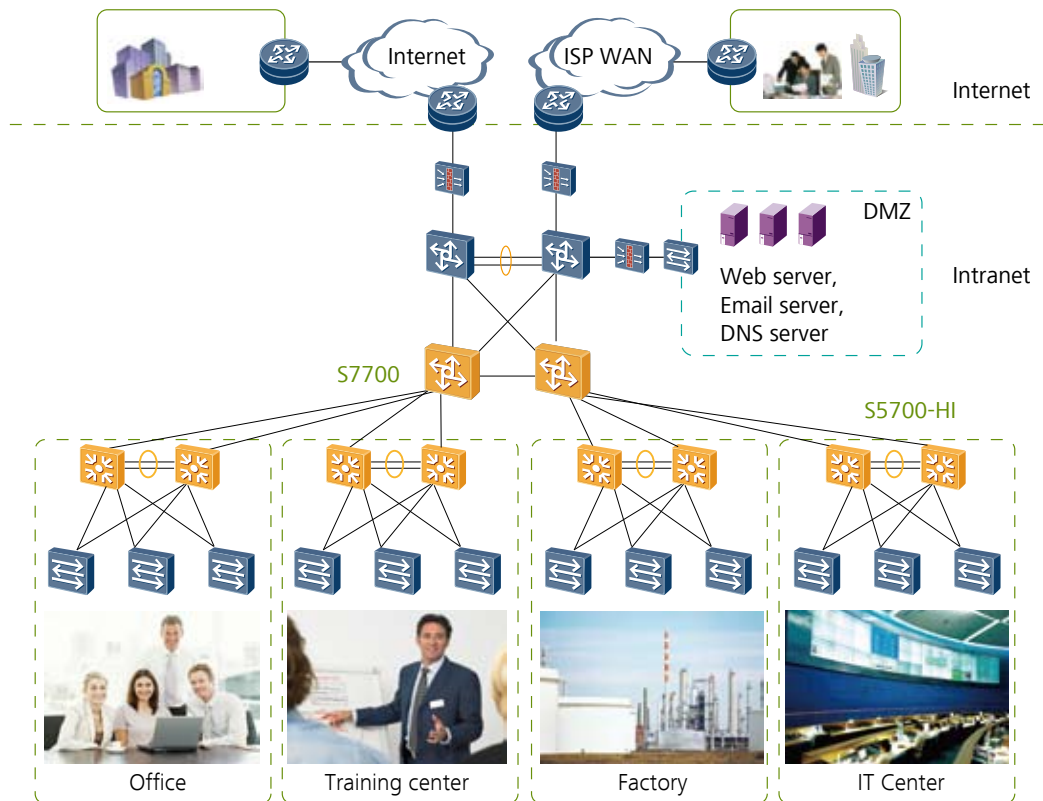

### In Data Centers

The S5700-HI can be used in a data center. It connects to gigabit servers and aggregates traffic from the servers to uplink devices through trunk links. If multiple servers are available, an S5700 stack can be used to facilitate network maintenance and improve network reliability.

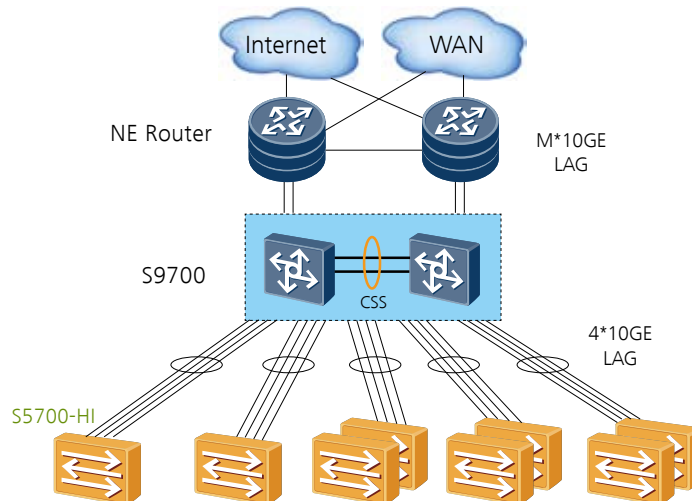

## Product List

### Product Description

S5700-28C-HI Mainframe(24 GE RJ45,Dual Slots of power,Single Slot of Flexible Card,Without Flexible Card and Power Module)

S5700-28C-HI-24S Mainframe (24 GE SFP,Dual Slots of power, Without Flexible Card and Power Module)

2-Port GE SFP or 10GE SFP+ Optical Interface Card (Used In S5700-HI Series)

4-Port GE SFP or 10GE SFP+ Optical Interface Card (Used In S5700-HI Series)

4-Port GE SFP Optical Interface Card (Used In S5700-HI Series)

For more information, visit <http://enterprise.huawei.com> or contact your local Huawei sales office.







**Copyright © Huawei Technologies Co., Ltd. 2012. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

#### **Trademark Notice**



, HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd.

Other trademarks, product, service and company names mentioned are the property of their respective owners.

#### **General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO., LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129, P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)