

# AREMO-4196

The Best Cost-Performance 19" 4U Height Pentium® 4 Processor Based Rack-mount Computer



## FEATURES

- Three 5.25" and one external 3.5" HDD drive bays for RAID 0, 1, 5 & CD-ROM
- Two USB ports on the front panel
- Dual 12cm ball-bearing cooling fans for better ventilation
- Two card retainer positions
- PS/2 or redundant power supply installable
- ATX M/B applicable, especially for big-ATX size M/B
- Easily detached and washable air filter
- Equipped with fan control card to detect fan failure

## ORDERING GUIDE

- **AREMO-4196**  
19" 4U rack-mount chassis for PICMG version
- **AREMO-4196-MX**  
19" 4U rack-mount chassis for M/B version
- **AREMO-4196-MX-4201P**  
19" 4U rack-mount chassis for ATX motherboard with active 420W ATX, Active PFC power supply
- **AREMO-4196-00-4201P**  
19" 4U rack-mount chassis for PICMG version and 420w ATX, Active PFC power supply (3-in-2 mobile rack Drive is optional)

## GENERAL

Construction	Heavy-duty steel with aluminum front panel
Drive Bay	External: 5.25" x3, 3.5" HDD x1
Card Retainer	Three locations for one card retainer
Air Filter	Two replaceable air filter
Cooling Fan	Two 12cm 8cm ball-bearing cooling fans
Indicator	Power on/off x1, HDD x1
Switch	Power on/off x1, System reset x1
Speaker	One 8Ω speaker
Connector	Two USB ports on the front panel
Standard Color	Silver, Black
Dimension	482(W) x 481(D) x 177(H) mm; 19"(W) x 18.1"(D) x 7"(H)
Weight	Net: 13.5 kg (29.8 lb); Gross: 14.5 kg (32 lb)
Backplane	PBP-14I: 14-slot ISA backplane PBP-14AC: 14-slot (12xPCI) active PICMG backplane PBP-14A7: 14-slot (7xPCI) active PICMG backplane PBP-14P4: 14-slot (4xPCI) PICMG backplane PBP-13D4: 13-slot dual-system PICMG backplane

## POWER SUPPLY

### ORION-D4201P optional

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	5A@230V; 10A@115V
Efficiency	> 70%
Holdup Time	17 ms. at full load @25°C
Over Voltage Protection	+5V@7V; +3.3V@4.5V; +12V@15.6V
Over Power/Load Protection	Output power over to 110%~140%
MTBF	100,000 hrs
EMI & Safety Approval	UL, TUV
Temperature/Humidity	Operating: 0 ~ 50°C, 20 ~ 85%RH Storage: -40 ~ 70°C, 10 ~ 90%RH
Dimension (WxDxH)	150 x 140 x 86 mm; 5.9" x 5.5" x 3.4"

## ENVIRONMENT

Operating Temperature Range	0 to +55°C
Storage Temperature Range	-20 to +80°C
Relative Humidity	5% to 95%, non-condensing
Vibration	5~7 Hz: 0.5" double amplitude displacement 7~2000 Hz: 1.5g acceleration

# AREMO-4196

The Best Cost-Performance 19" 4U Height Pentium® 4 Processor Based Rack-mount Computer

FEATURE	BENEFITS
<ul style="list-style-type: none"> <li>■ A lockable front door with thumb lock</li> </ul>	<ul style="list-style-type: none"> <li>■ Good for dust-proof &amp; security</li> </ul>
<ul style="list-style-type: none"> <li>■ One power on/off switch and one system reset button on the front panel behind the lockable door</li> </ul>	<ul style="list-style-type: none"> <li>■ Avoid accidental reset for better running security</li> </ul>
<ul style="list-style-type: none"> <li>■ Fan control board</li> </ul>	<ul style="list-style-type: none"> <li>■ Detect fan fail and Alarm</li> </ul>
<ul style="list-style-type: none"> <li>■ Front replaceable air filter</li> </ul>	<ul style="list-style-type: none"> <li>■ For easy cleaning and install</li> </ul>
<ul style="list-style-type: none"> <li>■ Equipped two USB ports</li> </ul>	<ul style="list-style-type: none"> <li>■ Efficient Access</li> </ul>
<ul style="list-style-type: none"> <li>■ Dual 12cm ball-bearing cooling fans</li> </ul>	<ul style="list-style-type: none"> <li>■ Better ventilation to provide the system with higher reliability</li> </ul>
<ul style="list-style-type: none"> <li>■ Enhanced drive bracket to hold three 5.25" and two 3.5" HDD drives (internal)</li> </ul>	<ul style="list-style-type: none"> <li>■ For integrating varied systems with higher flexibility</li> <li>■ Suitable for installing RAID and CD-ROM drive</li> </ul>
<ul style="list-style-type: none"> <li>■ Shock-resistant cushion for the drive bracket</li> </ul>	<ul style="list-style-type: none"> <li>■ Suitable for harsh industrial environment</li> </ul>
<ul style="list-style-type: none"> <li>■ Two adjustable positions for hold-down card retainers</li> </ul>	<ul style="list-style-type: none"> <li>■ For fixing all the cards more flexibly and tightly</li> </ul>
<ul style="list-style-type: none"> <li>■ Changeable modularized back panel for 14-slot ISA/PICMG backplane or ATX motherboard</li> </ul>	<ul style="list-style-type: none"> <li>■ Only one minute to change the back panel</li> <li>■ Easy to change to different backplanes and keep stock</li> </ul>
<ul style="list-style-type: none"> <li>■ Field replaceable power supply bracket for both normal PS/2 power supply and PS/2 type redundant power supply</li> </ul>	<ul style="list-style-type: none"> <li>■ Only three minutes to change the defective power supply</li> <li>■ Only thirty seconds to change the defective PSU module</li> </ul>

## WHAT'S NEW



PCI based RAID kits, supporting up to three SATA HDDs with RAID 0, 1, 5 selections. The Disk bus is E-IDE with Ultra DMA support. The RAID kits provide a GUI manager for installation and maintenance. Hot-swap and hot-spare capabilities are also supported.



Friendly design of handles, you can lift and unmount AREMO-4196 comfortably and easily.



Power switch, RESET switch, HDD / Power / Fan-fail / LAN LEDs and two USB 2.0 ports are on the front panel.



Flexible design to install power supply, the bracket can be adapt to PS/2 type or mini-redundant power supply.



AREMO-4196 enhances the drive bracket to integrate up to three 5.25" and one 3.5" disk drives within a limited space. (extra two 3.5" HDD drives for AREMO-4196-MX)



Equipped with dual 12cm ball bearing fans, AREMO-4196 provides the best ventilation up to 208CFM to expire heat from the system.



AREMO-4196 adopts the newly designed card retainer to hold both the PCI and ISA type add-on-cards more tightly.



AREMO-4196 is equipped with two USB 2.0 connectors on the front panel to have a better security control.



The washable fan filter can be easily taken off to make an easier maintenance.



LED indicators include power, HDD, Fan-fail and LAN functions.



The thumb lock offers easy operation. Users can choose to lock it or not.



The washable fan filter can be easily taken out for easier maintenance.

# AREMO-4196


The Best Cost-Performance 19" 4U  
Height Pentium® 4 Processor Based  
Rack-mount Computer



AREMO-4196



AREMO-4196-MX

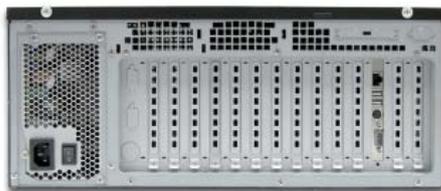

## ENGINEERING DRAWING

